

RPFL Std Colorbond® XRW/Ultra 0.55 BMT Flashing
 Base Materials: coating AZ200 Steel Grade G300.
 fixed to the roof cladding with SDM Screw/Pop rivet.

Top & Bottom Infill Strips/filler block or profiled foam fillers
 insert between roof cladding and flashing.

Flashguard Soft Edge flashing for metal roof accessories
 Weather sealing membrane with elastic characteristics
 compatible with zincalume, aluminium & galvanised steel
 roof materials.


RPFL SuperDek® Colorbond® XRW/Ultra
 0.42BMT/0.48BMT roof cladding. Base Materials: Steel
 Grade G550. BMT 0.42. Mass 4.3kg/m² or 0.48BMT
 4.9kg/m². AZ 150 coating for XRW & AZ 200 coating for
 Ultra. Profiles tested for Cyclonic Conditions.

Kingspan AIR-CELL INSULINER Self-Supported 3-in-1
 Insulation Vapour Barrier and Radiant Barrier or
 430 WF Med. duty sisalation

Aushmesh 300 Galvanized roof safety mesh
 Wire mesh 1.8 X 50m(90m²/roll) Mesh gap
 300 X 150mm

Timber Purlins as per engineer details

Structure as per engineers details

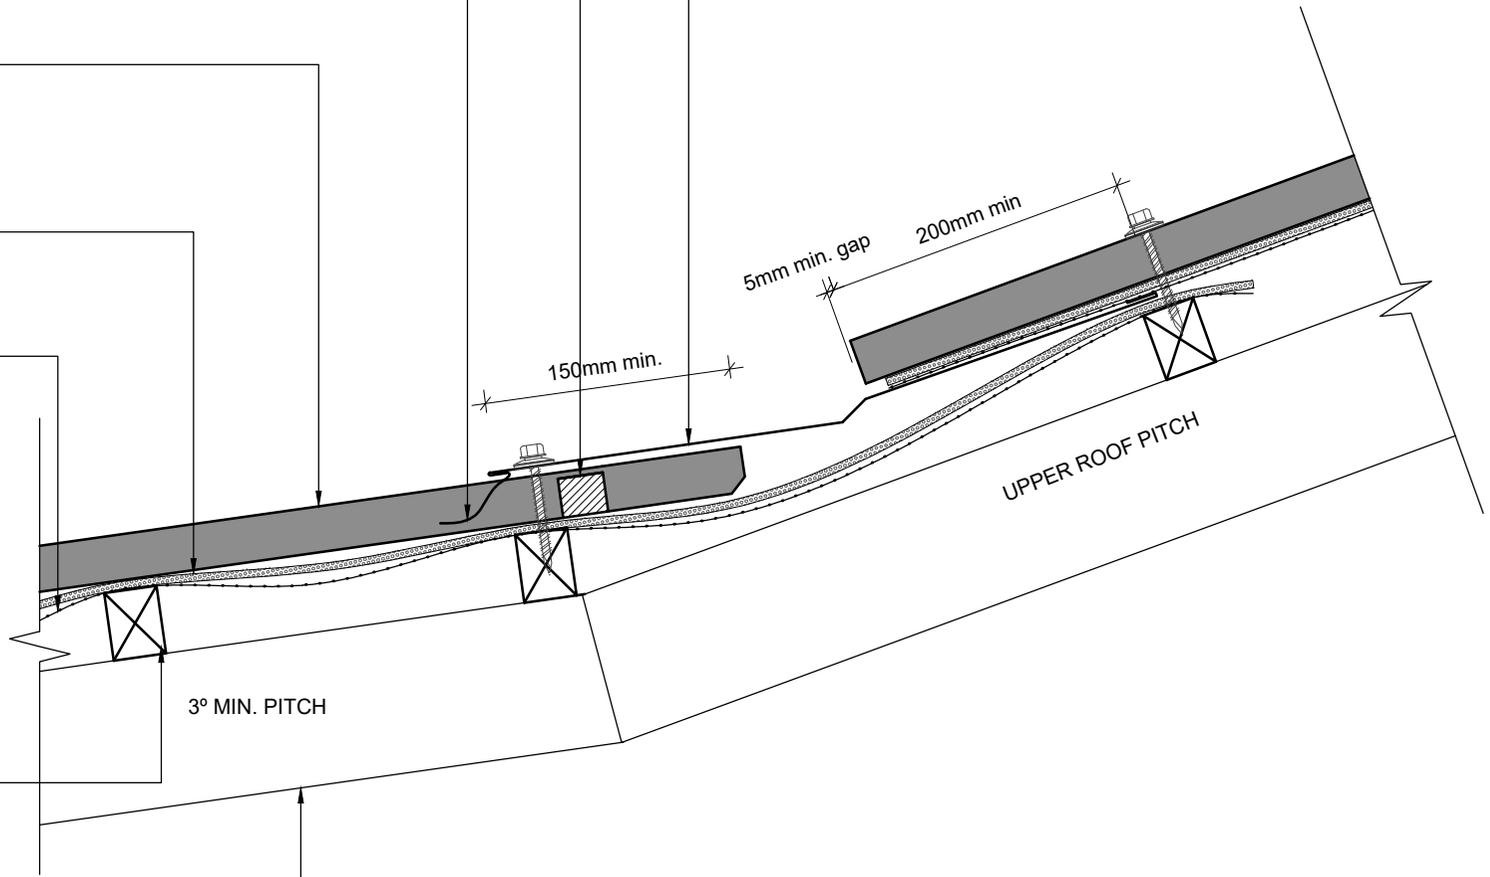

Notes:
 All installation to be as per New Zealand steel
 specification and installation guide. (March 2011)
 & New Zealand roof and cladding
 CODE OF PRACTICE (Version 2.2/2012)



Roofing & Profiles (Fiji) Pte Ltd
 Ph: (679) 6673764 M: 999 9309
 Email: info@roofingandprofiles.com.fj

This drawing is the property of Roofing &
 Profiles (Fiji) Pte Ltd and must not be copied
 or disclosed to any third party without the
 written consent of the company.
 ALL DIMENSIONS ARE IN mm UNLESS
 STATED

PROJECT TITLE:
ROOF DETAILS

 DRAWING TITLE:
SHOP DRAWINGS

DRAWN: C.V.B

SCALE: 1:5 @ A4

SHEET No : SD-1110

DATE : 09/12/2020

REVISION No:

REVISION TITLE:

CHECKED BY:

APPROVED BY:

JOB NUMBER: 13 - RAIN