

RPFL SuperDek® Colorbond® XRW/Ultra
 0.42BMT/0.48BMT wall cladding. Base Materials: Steel
 Grade G550. BMT 0.42. Mass 4.3kg/m² or 0.48BMT
 4.9kg/m². AZ 150 coating for XRW & AZ 200 coating for
 Ultra. Profiles tested for Cyclonic Conditions.

Kingspan AIR-CELL INSULINER Self-Supported
 3-in-1 Insulation Vapour Barrier and Radiant Barrier
 or 430 WF Med. duty sisalation


Top & Bottom Infill Strips/filler block or profiled foam fillers
 insert between roof cladding and flashing.

BRA-TYPE 17 Self drilling assemblies for Timber. Type 17
 14-10x75 HEX Bra. B8 protection to AS 3566 class 4. Tested &
 Certified to AS/NZS 1170.2 & BCA 2006 specification B1.2 for
 the design of building in cyclone area. For Timber Purlins. Fixed
 at every stud

RPFL Std Colorbond® XRW/Ultra 0.55 BMT HeadFlashing
 Base Materials: coating AZ200 Steel Grade G300.
 fixed to the roof cladding with SDA Screw, 15° fall to top

Use sealant for every high wind zones & above

Maintain a 5 mm gap around the window frame

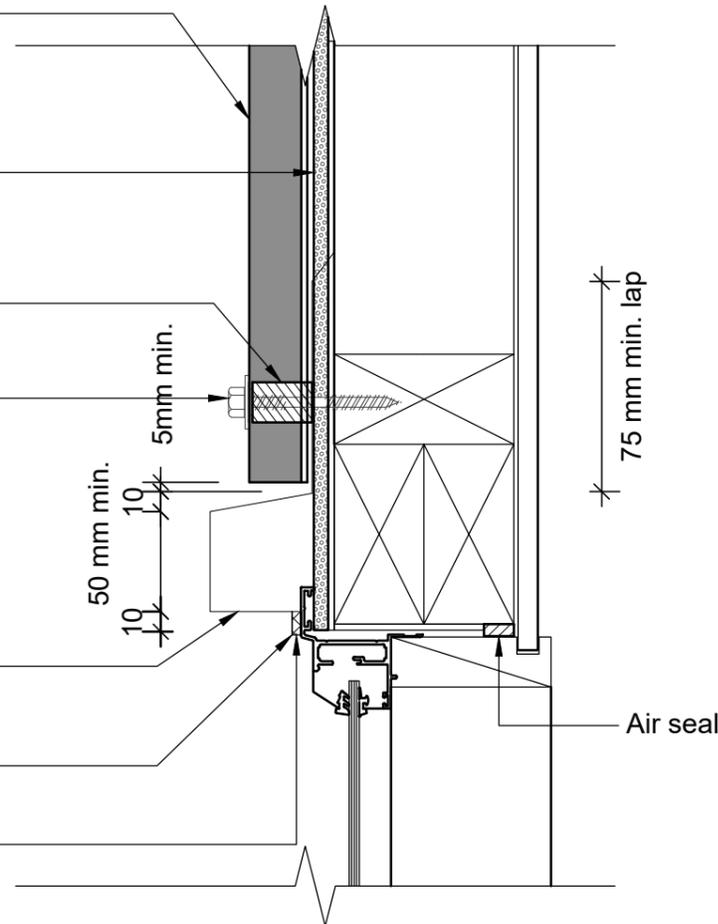

Notes:
 All installation to be as per New Zealand steel
 specification and installation guide. (March 2011)
 & New Zealand roof and cladding
 CODE OF PRACTICE (Version 2.2/2012)



Roofing & Profiles (Fiji) Pte Ltd
 Ph: (679) 6673764 M: 999 9309
 Email: info@roofingandprofiles.com.fj

This drawing is the property of Roofing &
 Profiles (Fiji) Pte Ltd and must not be copied
 or disclosed to any third party without the
 written consent of the company.
 ALL DIMENSIONS ARE IN mm UNLESS
 STATED

PROJECT TITLE:
WINDOW FLASHING INSTALLATION

DRAWING TITLE:
SHOP DRAWINGS

DRAWN: RRF	SCALE: 1:5 @ A4	SHEET No : SD 2040
DATE : 14/01/2021	REVISION No:	REVISION TITLE:
CHECKED BY:	APPROVED BY:	JOB NUMBER: 13 - RAIN