




## Zinalume<sup>®</sup> Rolled Top Ridge Cap

1. Good Looking and easy to install
2. Matches with variable Roof pitch
3. Use Top Infill Blocks/Strips and Bostik Silicone for water proofing from Rain seepage & wind driven debris. (Soft edge flashing also available)
4. Fasten with BRA Screws with Bonded washer and B8 coating
5. Do not over tighten the screws. For best results use cordless drill at approx. 1500 RPM

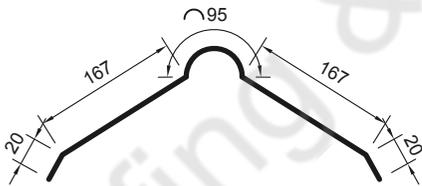

Roll Top Ridge Cap with Flash Guard,  
for **CorruDek<sup>®</sup>** Profile  
Total Glrth - 470mm  
Materials Spec: Zinalume<sup>®</sup> GalvSteel<sup>®</sup>,  
Colorbond<sup>®</sup> XRW/Ultra,  
BMT: 0.55 (mm)



**Colorbond<sup>®</sup> Ultra<sup>™</sup>**  
COLOUR FOR THE EXTREME

**Colorbond<sup>®</sup> XRW<sup>™</sup>**  
PROVEN COLOURS OF THE PACIFIC

P.O Box 9, Yalelevu, Kings Rd, Ba, Fiji Islands  
Phone: (679) 667 3764 | Mob: (679) 9999341

✉ [info@roofingandprofiles.com.fj](mailto:info@roofingandprofiles.com.fj)

🌐 [www.roofingandprofiles.com.fj](http://www.roofingandprofiles.com.fj)

find us on [facebook](#)